
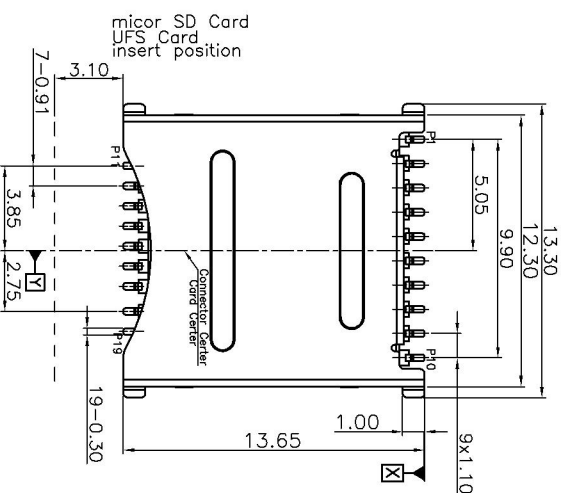


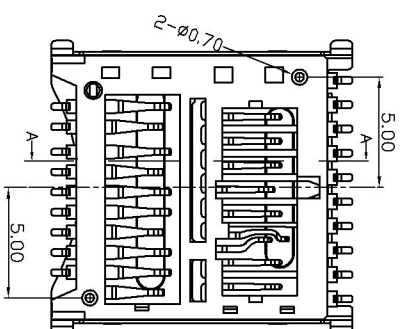

Specification

1. MATERIAL:

1.MATERIAL:

1.1 Insulator:High Temperature Thermoplastic,
(LCP S475),UL Black 94V-0.

(LCP S475), UL Black 94V-0.

1.2 Contact: Phosphor Bronze(C5210R-H,T=0.15±0.03mm)

1.3 Shell: SUS304 T=0.15±0.03mm

2.Plating:

2.1 Contact: Plated 50u"min Ni Overall

Plated 1u"min Au Selective contact area

Gold Flash over Ni on solder direct
2.2 Shell: Plated 30u"min Ni Overall

Gold Flash Selective Contact Area


3. Property:

3.1 Current Rating :0.5A .

3.2 Withstanding Voltage: AC500V r.m.s.

3.3 Ambient Temperature Range : $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
3.4 Contact Resistance: $200\text{m}\Omega$ max.

3.5 Insulation Resistance:500 M Ω Minimum at DC 500V.
3.6 Durability:10,000 cycles

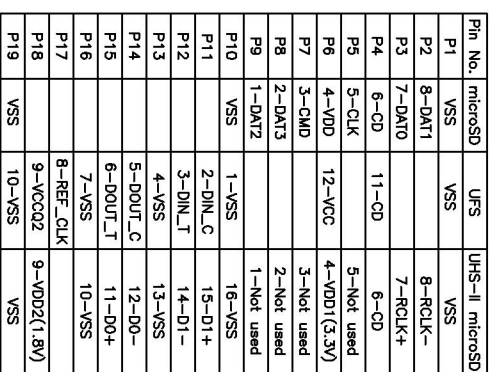

深圳市连欣科技有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:
X,X ±0.30		CO CO	2020.06.11	TF 三合一卡座 SMT TYPE
X,X ±0.25		CHECKED BY:	DATE :	PART NO.
X,X ±0.15			2020.06.11	MOLD NO.
X, ±2			DATE :	DRAW NO:
		APPROVED BY:	2020.06.11	LX-2206011718
		Andy		SHEET NO.
UNIT: mm [inch]				
SCALE:1:1				
SIZE: A4				