




REV.	DESCRIPTION	APPD	DATE

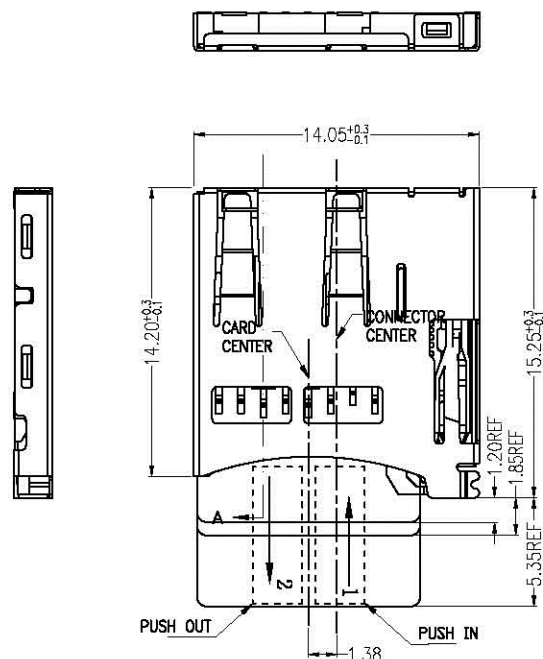

SECTION A-A

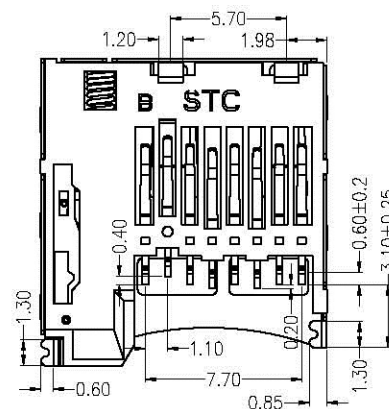

NOTES:



1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.


2.PLATING:

UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

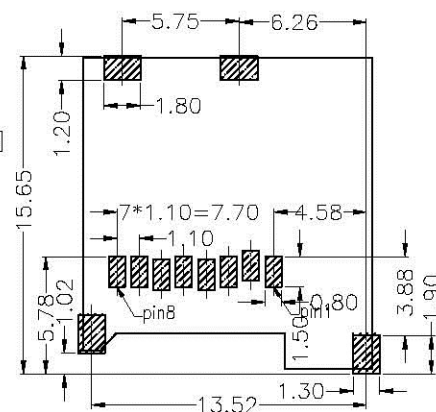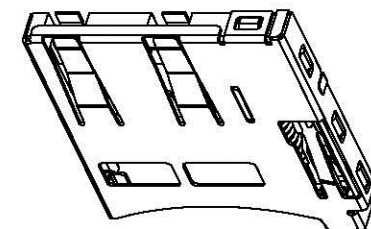

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)




PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)


PART NO: XDFP-1001-098		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: MM		SIZE: A4	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°	
DR: 杨凯 0416'10		CHK:	
APP:		DWG NO: FP-100098	
SCALE: 1:1		SHEET: 1 OF 2	
REV: B/1		TITLE: T-FLASH内焊 PUSH B Type	

深圳市连欣科技有限公司


REV.	DESCRIPTION	APPD	DATE

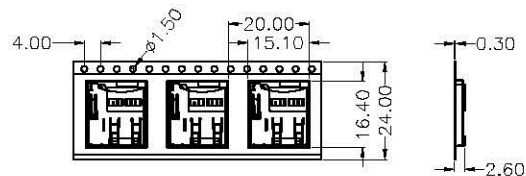

NO. 1

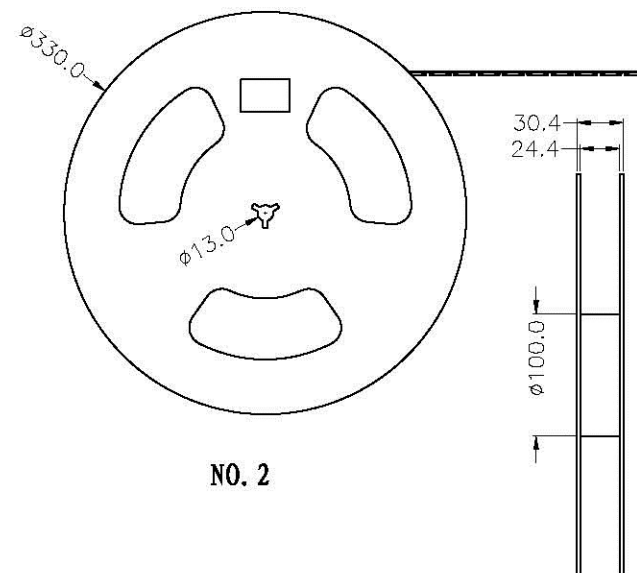


NO. 2

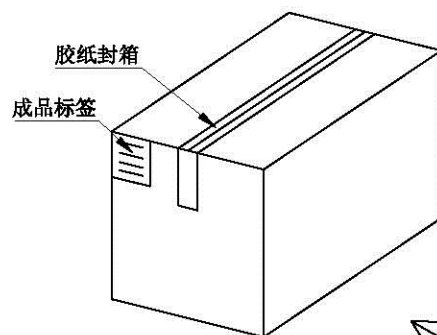

纸箱规格: 330*330*385

NO. 4

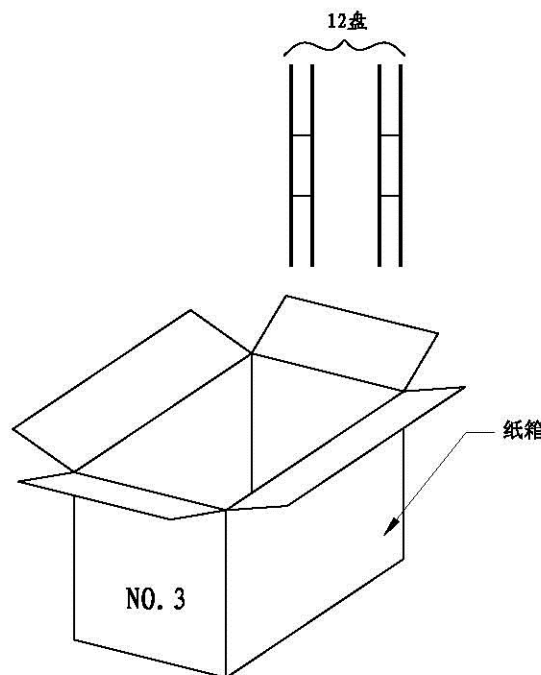

NO. 3

1. 材质要求:

- 1.1 纸箱的材质为B-B; 外形尺寸为33*33*38.5CM;
- 1.2 卷盘的材质为PVC, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PVC, 卷带的外形尺寸为20200*24.00*2.6mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12盘叠放入纸箱中共计12Kset;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

PART NO: XDFP-1001-098		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: MM	SIZE: A4	COLOR:	
TOLERANCES: X.X=±0.35 X.XX=±0.25 X.XXX=±0.15		DR: 杨凯 0416'10	
GENERAL ANGLE: X.X=±3.0° X.XX=±2.0°		CHK:	
		APP:	
		DWG NO: FP-100098	
		SCALE: 1:1	
		SHEET: 2 OF 2	
		REV: B/1	

深圳市连欣科技有限公司

T-FLASH内焊 PUSH B Type