


贴片时正反贴须告知，正反贴生产工艺有区别

* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

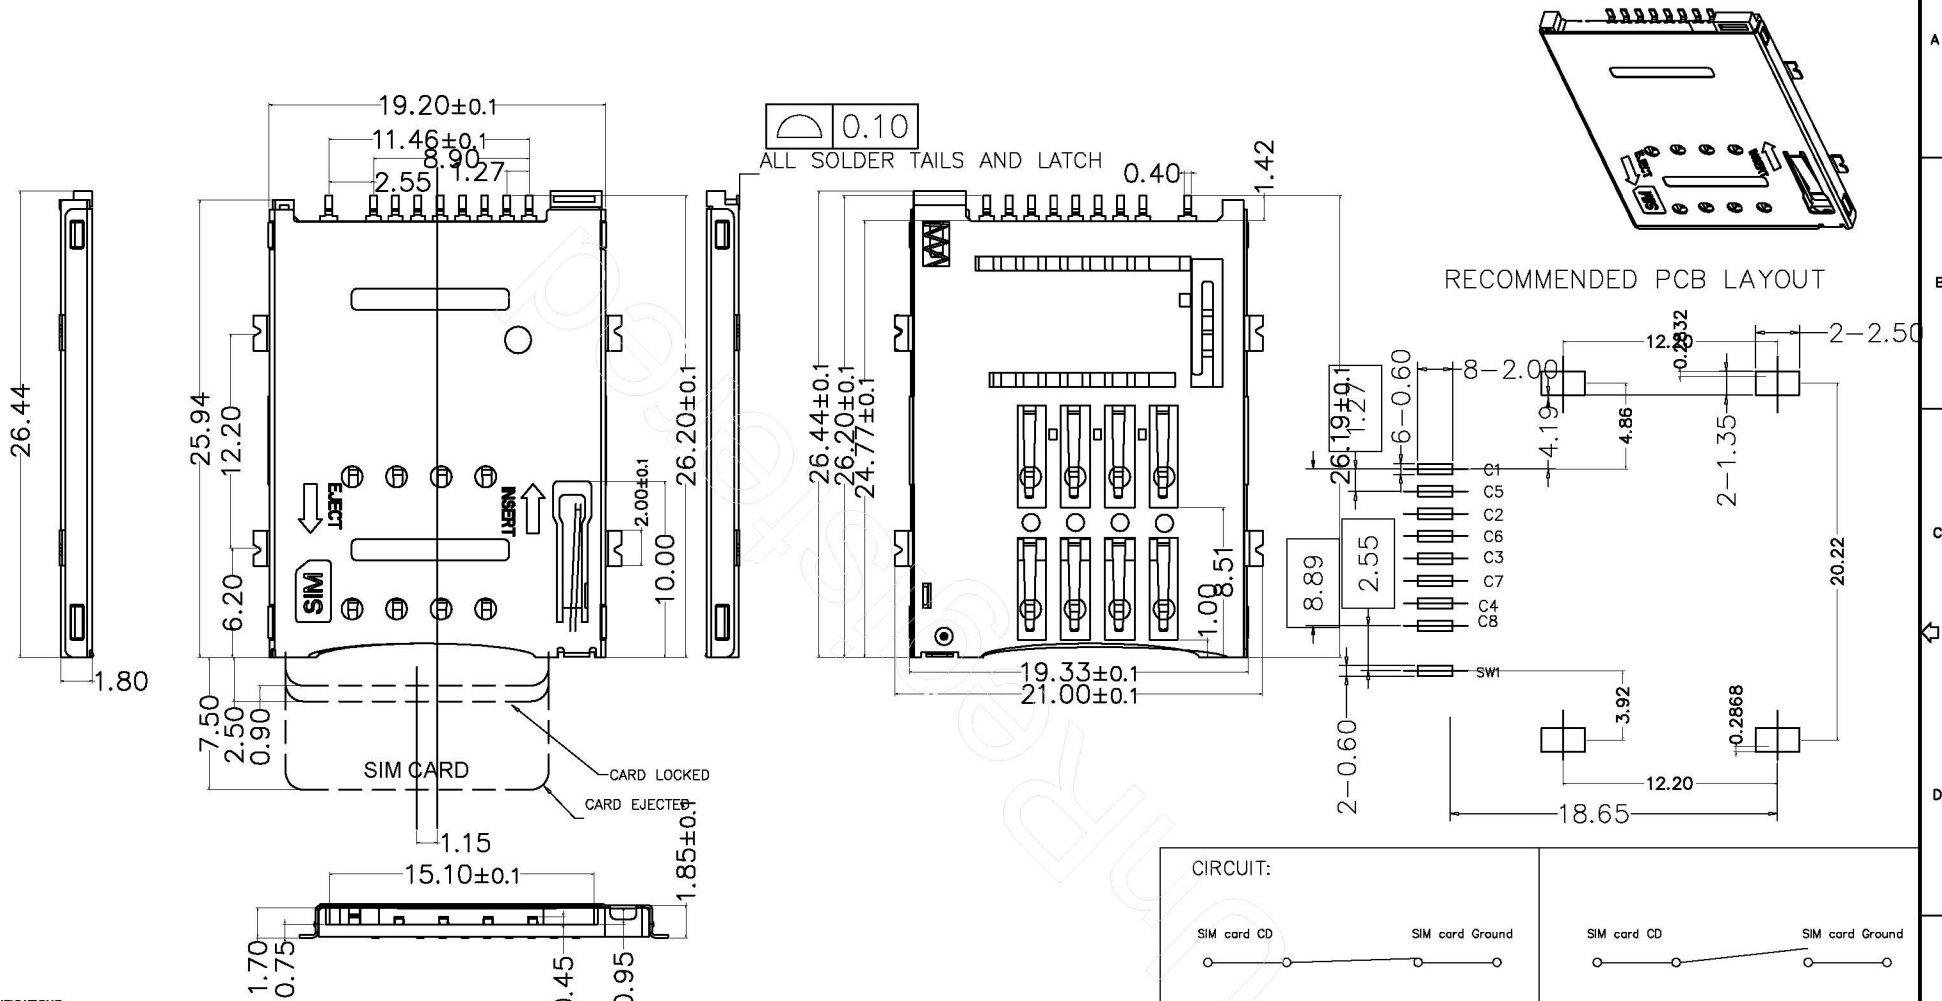


1.SPECIFICATIONS
INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100M max. AT 10mA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:-55 C+85 C
MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:
INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
COLOR:BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SHELL: STAINLESS STEEL,T=0.15mm

3.FINISH:
TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
LATCH

SIM pin assignment	
PIN#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C4	Reserved 备用
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出
C8	Reserved 备用

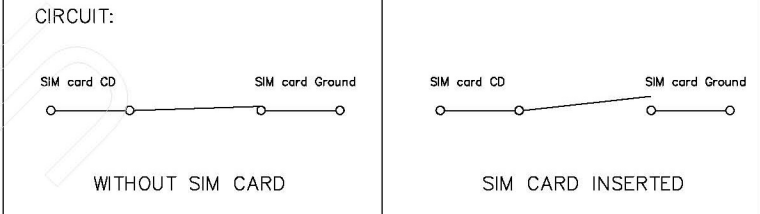



连欣科技
Lian Xin Technology

深圳市连欣科技有限公司

PRODUCT NAME :	SIM PUSH 8P+1P无柱	DRAWING:	COCO	DATE:	2012/05/10
PRODUCT NO. :	XDSM-0863-0111	CHECK:	JANY	DATE:	2012/05/10
DRAWING NO. :	0111AAAS06A	APPROVED:	JEFF	DATE:	2012/05/10
DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE		SCALE:	1:1	DWG ID:	P D
DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.10 X.XXX: ± 0.05 ANGULAR: ± 1°		REV.:	A	PAGE:	1 of 1

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				