

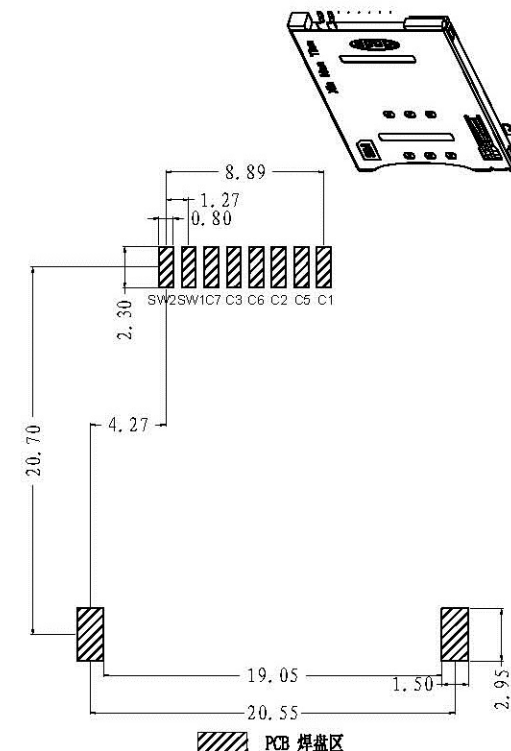
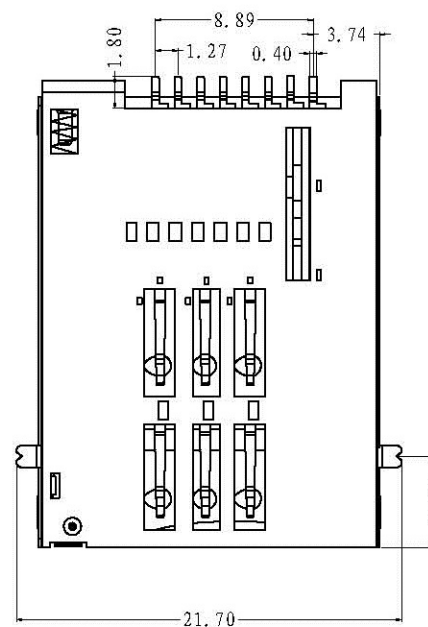


* 所有原材料, 生产制程, 电镀必须符合ROHS要求

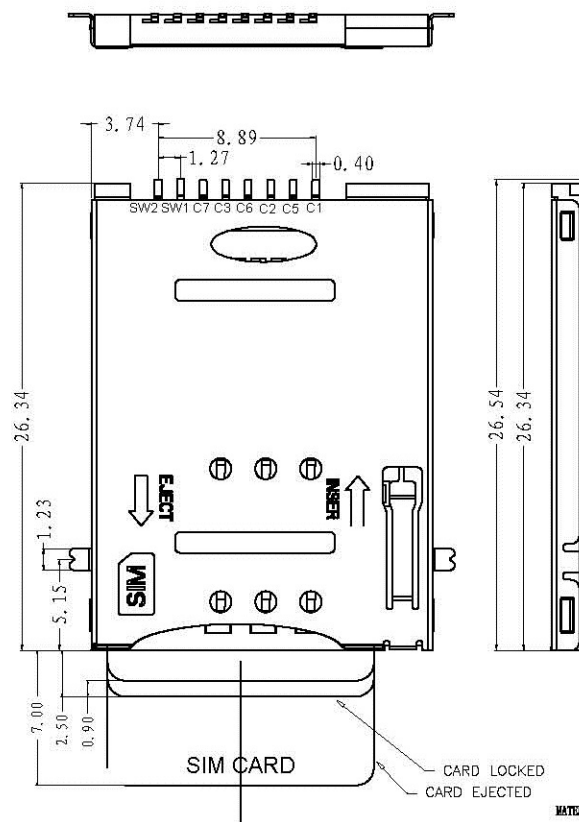

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ± 0.05

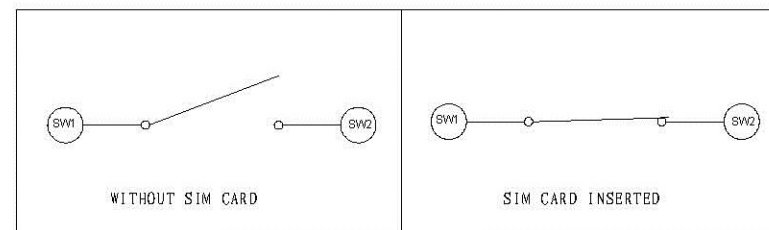

SIM pin assignment	
PIN#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出

MATERIAL:

Insulator: High Temperature Thermoplastic,
UL 94V-0, COLOR: BLACK LCP
(颜色: 黑色LCP, 防火等级: UL 94V-0)
Contact: Copper Alloy

PLATING:

Contact: Plated 50u" Ni Overall
Plated Au Selective Contact Area
Plated 100u" Sn Over Ni On Solder Area
(接触端子电镀: 全部镀50u, 接触区域10u, 焊脚处镀60u/最少)

Shell: Plated 50u" Ni Overall
Plated 1u" Au Selective Contact Area
(外壳电镀: 镀50u, 焊接处10u)

Electrical:

Current Rating : 0.5amps max (额定电流: 0.5A最大)
Voltage Rating : 5V AC/DC (额定电压: 5V AC/DC)
Ambient Temperature Range : -20° C ~ +60° C (工作温度: -20度到+60度)
Storage Temperature Range : -40° C ~ +80° C (工作温度: -40度到+80度)
Ambient Humidity Range : 95% R.H. Max. (上置效果: 95%以上)
Contact Resistance: 100mΩ max. (端子接触电阻: 100mΩ最大)
Insulation Resistance: 1000MΩ min. / 500VDC (绝缘电阻: 100兆欧最小)
Mating Cycles: 6,000 Insertions (寿命: 6000次)
产品耐温程度: 260° C



DIMENSIONS IN: mm
UNLESS OTHERWISE SPECIFIABLE

DIMENSION	TOLERANCE
X.X: $\pm$	0.25
X.XX: $\pm$	0.10
X.XXX: $\pm$	0.05
ANGULAR: $\pm$	1°

PRODUCT NAME :

SIM PUSH 6P+2P无柱

PRODUCT NO. :

XDSM-0211-0681

DRAWING NO. :

LX-0211BAAS06A

SCALE:

1:1

DWG ID:

P D

REV.:

A

PAGE:

1 OF 1

DRAWING:

COCO

CHECK:

JANY

APPROVED:

JEFF

DATE:

2012/05/10

DATE:

2012/05/10

DATE:

2012/05/10

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				
4				
5				
6				