

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD





NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\varnothing 0.46\text{mm}$ (C5100).
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- 5.LED: OPTION.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING
RESISTANCE :1000V AC RMS 50Hz. 1MIN.
- 6.LED RATINGS:FORWARD VOLTAGE:2.2 VOLTS TYPICAL.
REVERSE VOLTAGE:5 VOLTS MAXIMUM.

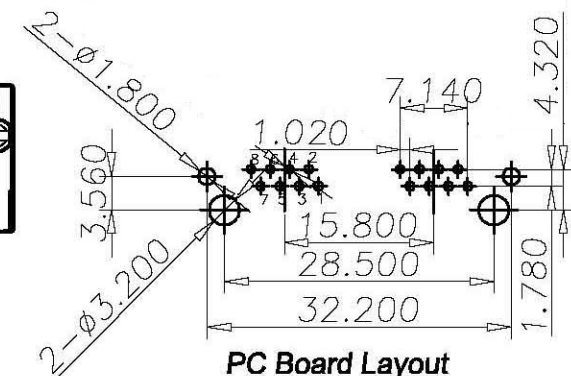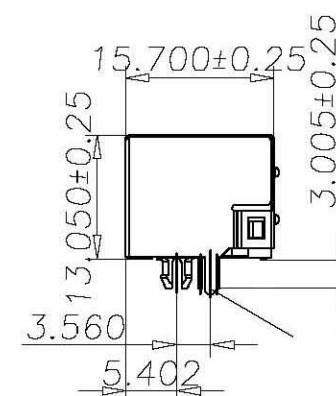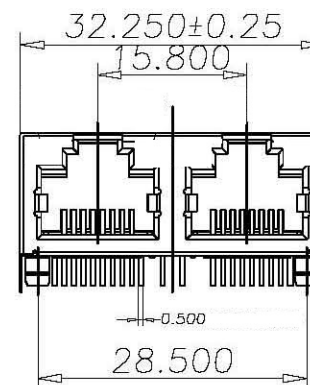

PC Board Layout

MECHANICAL:

- 1.DURRABILITY:750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE :-40°C TO +85°C.
2. OPERATION 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68,SUBPART F.

DETACHED LISTS	MM (INCH)		设计 ZHANG WEI	日期 13.03.10	深圳市连欣科技有限公司	
	一般公差		审核	日期		
	MM	±	批准 ZHANG KE	日期 13.03.10	系列	名称
	.0 ± 0.20	±	材料: 材料		系列	RJ45 JACK 1*2 DIP
	.00 ± 0.15	±	数量: 数量		图号: RJ-562L-022	A3 版本
	.000 ± 0.075	±	表面处理: 表面处理		料号: XDRJ-5622-0157	
	角度 ± 0.01°		比例: 比例		不按比例	共 X 页 第 Y 页
	第三角视图					