


PCB LAYOUT DIAGRAM
Top View

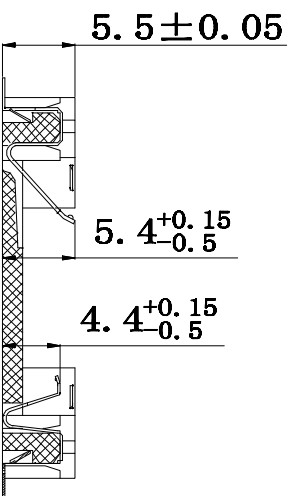

- NOTE:
 1. MATERIAL:
 a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 b. CONTACT: PHOSPHOR BRONZE
 (SURFACE PLATING: NI100u" SN100u" SN100u" 120u")
 SEE ORDERING INFORMATION
 2. ELECTRIC:
 a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
 b. INSULATION RESISTANCE: 1000 MEGA OHMS MAX
 c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
 d. OPERATING TEMPERATURE: -55° C ~ +85° C

TOLERANCE

Tolerance: Unless otherwise specified

NO.	PART NAME	MATERIAL	COLOR/FINISH
3	TERMINAL-2	PHOSPHOR BRONZE	Sn-Plated
2	TERMINAL-1	PHOSPHOR BRONZE	Sn-Plated
1	HOUSING	LCP	WHITE

LINEAR	ANGLE
X ±1	±0.38 X °
±5°	±0.25 X °
±2°	±0.10
±1°	

PART NO: XD CR-2032-604

TITLE:

CR2032-6 贴片电池座带孔 SMT

深圳市连欣科技有限公司

www.szlianxinkeji.com/