


P.C.B. LAYOUT

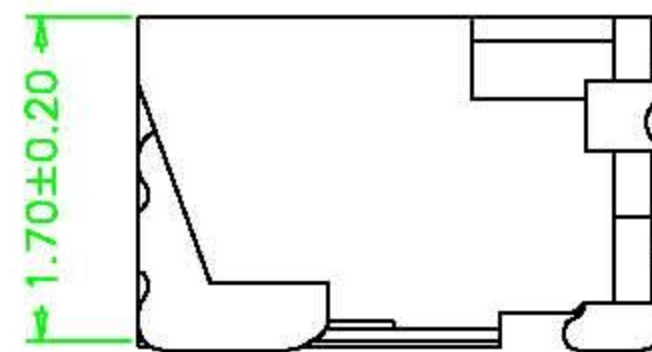

**SPECIFICATIONS**

Current Rating: 0.5A AC,DC  
 Voltage Rating: 30V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 200V AC/minute  
 Pin Material: Phosphor Bronze/Tin-plated  
 Solder Tabs: Phosphor Bronze/Tin-plated  
 Material: LCP,UL94V-0  
 Color: Natural(Beige)

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A0800WR-S-02P	0.80	3.80
A0800WR-S-03P	1.60	4.60
A0800WR-S-04P	2.40	5.40
A0800WR-S-06P	4.00	7.00
A0800WR-S-07P	4.80	7.80
A0800WR-S-08P	5.60	8.60
A0800WR-S-10P	7.20	10.20
A0800WR-S-12P	8.80	11.80
A0800WR-S-14P	10.40	13.40
A0800WR-S-15P	11.20	14.20
A0800WR-S-16P	12.00	15.00
A0800WR-S-17P	12.80	15.80
A0800WR-S-20P	15.20	18.20

				<b>L&amp;X 深圳市连欣科技有限公司</b>	
		UNIT	SCALE	SHEET	
		mm		1 of 2	
		DRAWN BY		APPROVED BY	
		GENERAL TOLERANCE			
		X.X±0.25		ANGLE±	
		X.XX±0.15		⊕	
		X.XXX±0.05			
REV.	DESCRIPTION	DATE			
			TITLE:		
			0.80mm PITCH 90°WAFER-SMT TYPE		
			DRAW NO.:		REV.
			XDWF-0800-**P		A4