
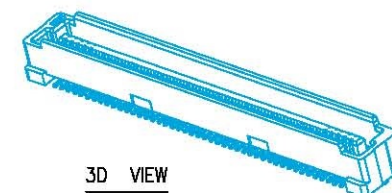


修订 REV	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE


NOTES:

- 1.HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LXB638-xxP-COR

PACKING: R: CARRIER REEL
STANDARD TYPE
COLOR:BEIGE
PLUG
PIN
0.8 BTB
HEIGHT: 38--3.8H
BHCONN BTB CONNECTOR SERIES







3D VIEW

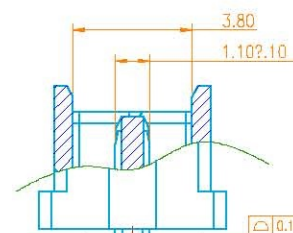

SECTION: A-A
SCALE 2:1

NO.of contacts	Dimensions			
	A.	B.	C.	D.
40	21.80	15.20	16.80	20.20
60	29.80	23.20	24.80	28.20
80	37.80	31.20	32.80	36.20
100	45.80	39.20	40.80	44.20
120	53.80	47.20	48.80	52.20
140	61.80	55.20	56.80	60.20
160	69.80	63.20	64.80	68.20
180	77.80	71.20	72.80	76.20
200	85.80	79.20	80.80	84.20

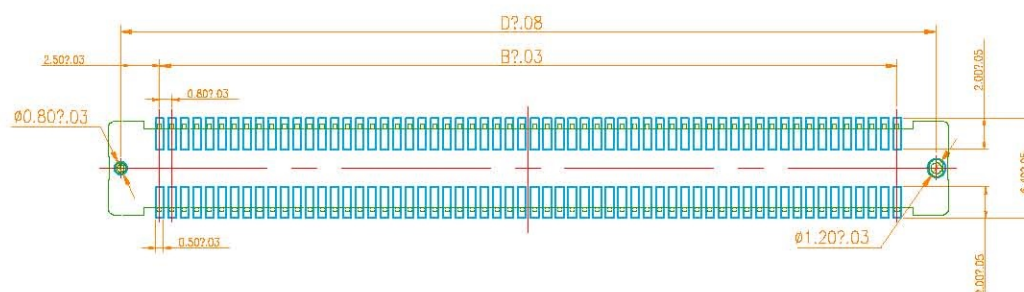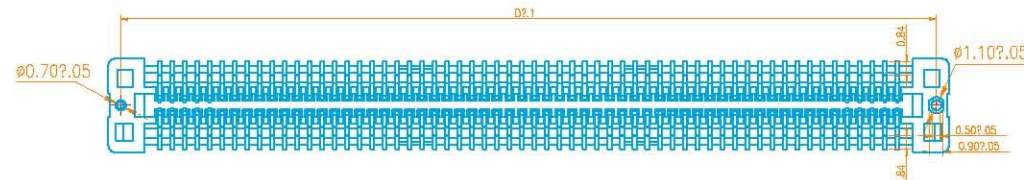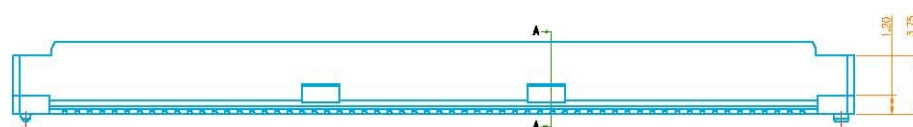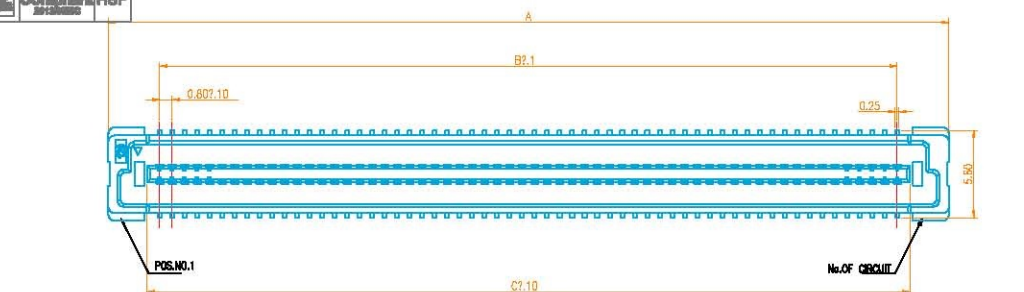

RECOMMENDED P.C.BOARD LAYOUT






深圳市连欣科技有限公司

制图 (DW): Kevin
审核 (CHK):
批准 (APP):



品名 (TITLE): 0.8mm PITCH BTB CONNECTOR PLUG ASSEMBLY 5.0H TYPE
料号 (PART NO): XDB638-xxP-COR



版本 (REV): 1.1
比例 (SCALE): 1:1
数量 (QTY): 1000
单位 (UNIT): mm

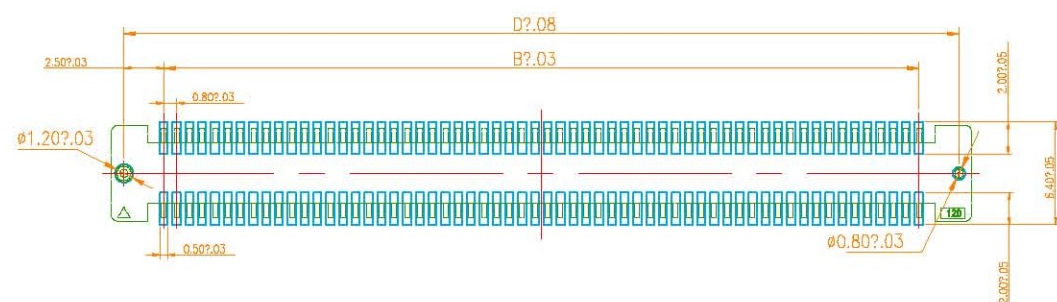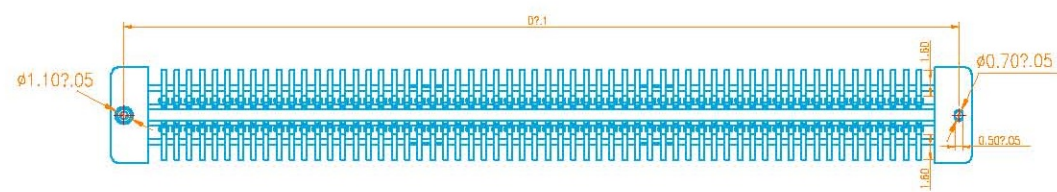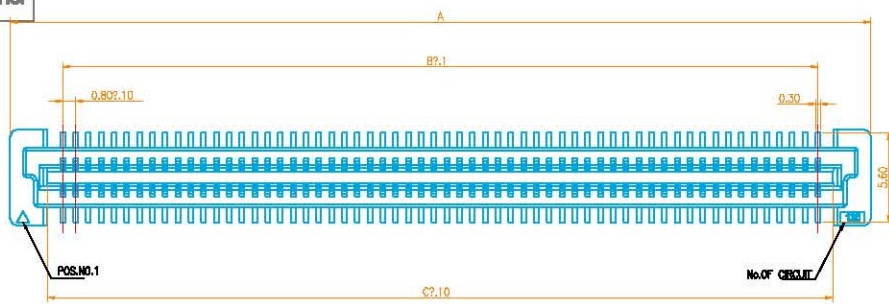

RECOMMENDED P.C.BOARD LAYOUT

NOTES:

- 1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.TERMINAL:PHOSPHOR BRONZE
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LXB612-**-P-COR

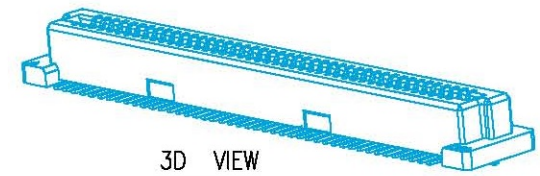

3D VIEW

NO.of contacts	Dimensions			
	A.	B.	C.	D.
40	21.80	15.20	17.10	20.20
60	29.80	23.20	25.10	28.20
80	37.80	31.20	33.10	36.20
100	45.80	39.20	41.10	44.20
120	53.80	47.20	49.10	52.20
140	61.80	55.20	57.10	60.20
160	69.80	63.20	65.10	68.20
180	77.80	71.20	73.10	76.20
200	85.80	79.20	81.10	84.20



深圳市连欣科技有限公司

一、产品说明 GENERAL INFORMATION	0.8mm PITCH BTB CONNECTOR RECEPTACLE ASSEMBLY 5.0H TYPE			
品名(TITLE):	XDB612-**-P-COR			
料号(PART NO):	XDB612-**-P-COR			
版本(VER):	比例(SCALE):	图例(SYMBOL):	数量(QUANTITY):	单位(UNIT):
1.0	1:1		1.00	mm